


ProTag PAC3760 DL

Best Value AS/NZS3760 Test & Tag, Log Book & Test Tag Printer System



Log Book
Download Stored Test Results

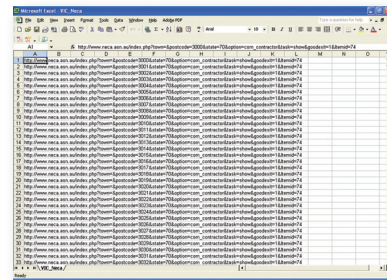

Test Tags
PAC-OPT AS/NZS3760 Test Tag Printer

- Never Handwrite Log Books & Test Tags Again
- Appliance & RCD Testing, Data Logging and Tag Printing
- Download Test Results into any Spreadsheet or Database Program
- Australia's Best Value Data Logging & Test Tag Printing System

Ordering Information:

Part No	Description	Trade Ex GST	Trade Inc GST
PAC3760DL	Data Logging Appliance & RCD Tester	\$949.00	\$1,043.90
PAC-OPT	AS/NZS760 Test Tag Printer	\$950.00	\$1,045.00
PAC3760DL & PAC-OPT Package Price		\$1,899.00	\$2,088.90
Optional Accessories			
PAC-TPL	Leakage Test 3-Phase Adaptor	\$1,099.00	\$1,208.90

Seaward PAC3760DL

Australia's Best Value AS/NZS3760 System

The PAC3760DL provides earth continuity, insulation resistance, leakage current testing, RCD testing and optional three phase testing according to the requirements of AS/NZS3760:2010.

The unique 9 push button operation makes testing and tagging easy. Conduct the test, press the SAVE button to store the result and press the PRINT button to print out the test tag. The fast, easy and affordable solution.

Seaward	Specifications
	PAC3760DL
Display	Bright LCD
Indication	Pass/Fail, Measurement Value
Operation	9 Push Button
Enclosure	Hand-held, IP Rating IP40
Leads	Earth Bond, IEC, Mains Supply, USB Download & Serial Printer
Interfaces	USB & Serial
On-Board Memory	999 Test Results
Download Format	CSV File
Carry Case	Deluxe Padded
Dimensions(LxWxH)	265 x 110 x 55mm
Weight	0.8kg
Overvoltage Category	CAT II 300V
Electrical Safety	IEC61010-1:2001, IEC61326:2005

Seaward	Tests Performed
	PAC3760DL
Polarity	Yes
Earth Continuity	200mA, 1ohm
Insulation Resistance	500V DC, 1Mohm
Class I Leakage Current	5mA
Class II Leakage Current	1mA
MOV Devices Class I Leakage Current	5mA
MOV Devices Class II Leakage Current	1mA
Lead/Cord Extension Sets with MOV Leakage Current	1mA
10mA RCD (with in-built isolation transformer)	40ms
30mA RCD (with in-built isolation transformer)	300ms
Optional 3 Phase Leakage Test	5mA

Seaward	Features
	PAC-OPT Test Tag Printer
Interface	Serial Cable
Print Type	Thermal Direct
Test Tags	OPT OPTIMA Type, General Indoor & Outdoor

Seaward	Tests Performed
	Accessories
PAC-TPL	3 Phase Earth & Leakage
TPI Adaptors	3 Phase Earth & Insulation

Available from: